
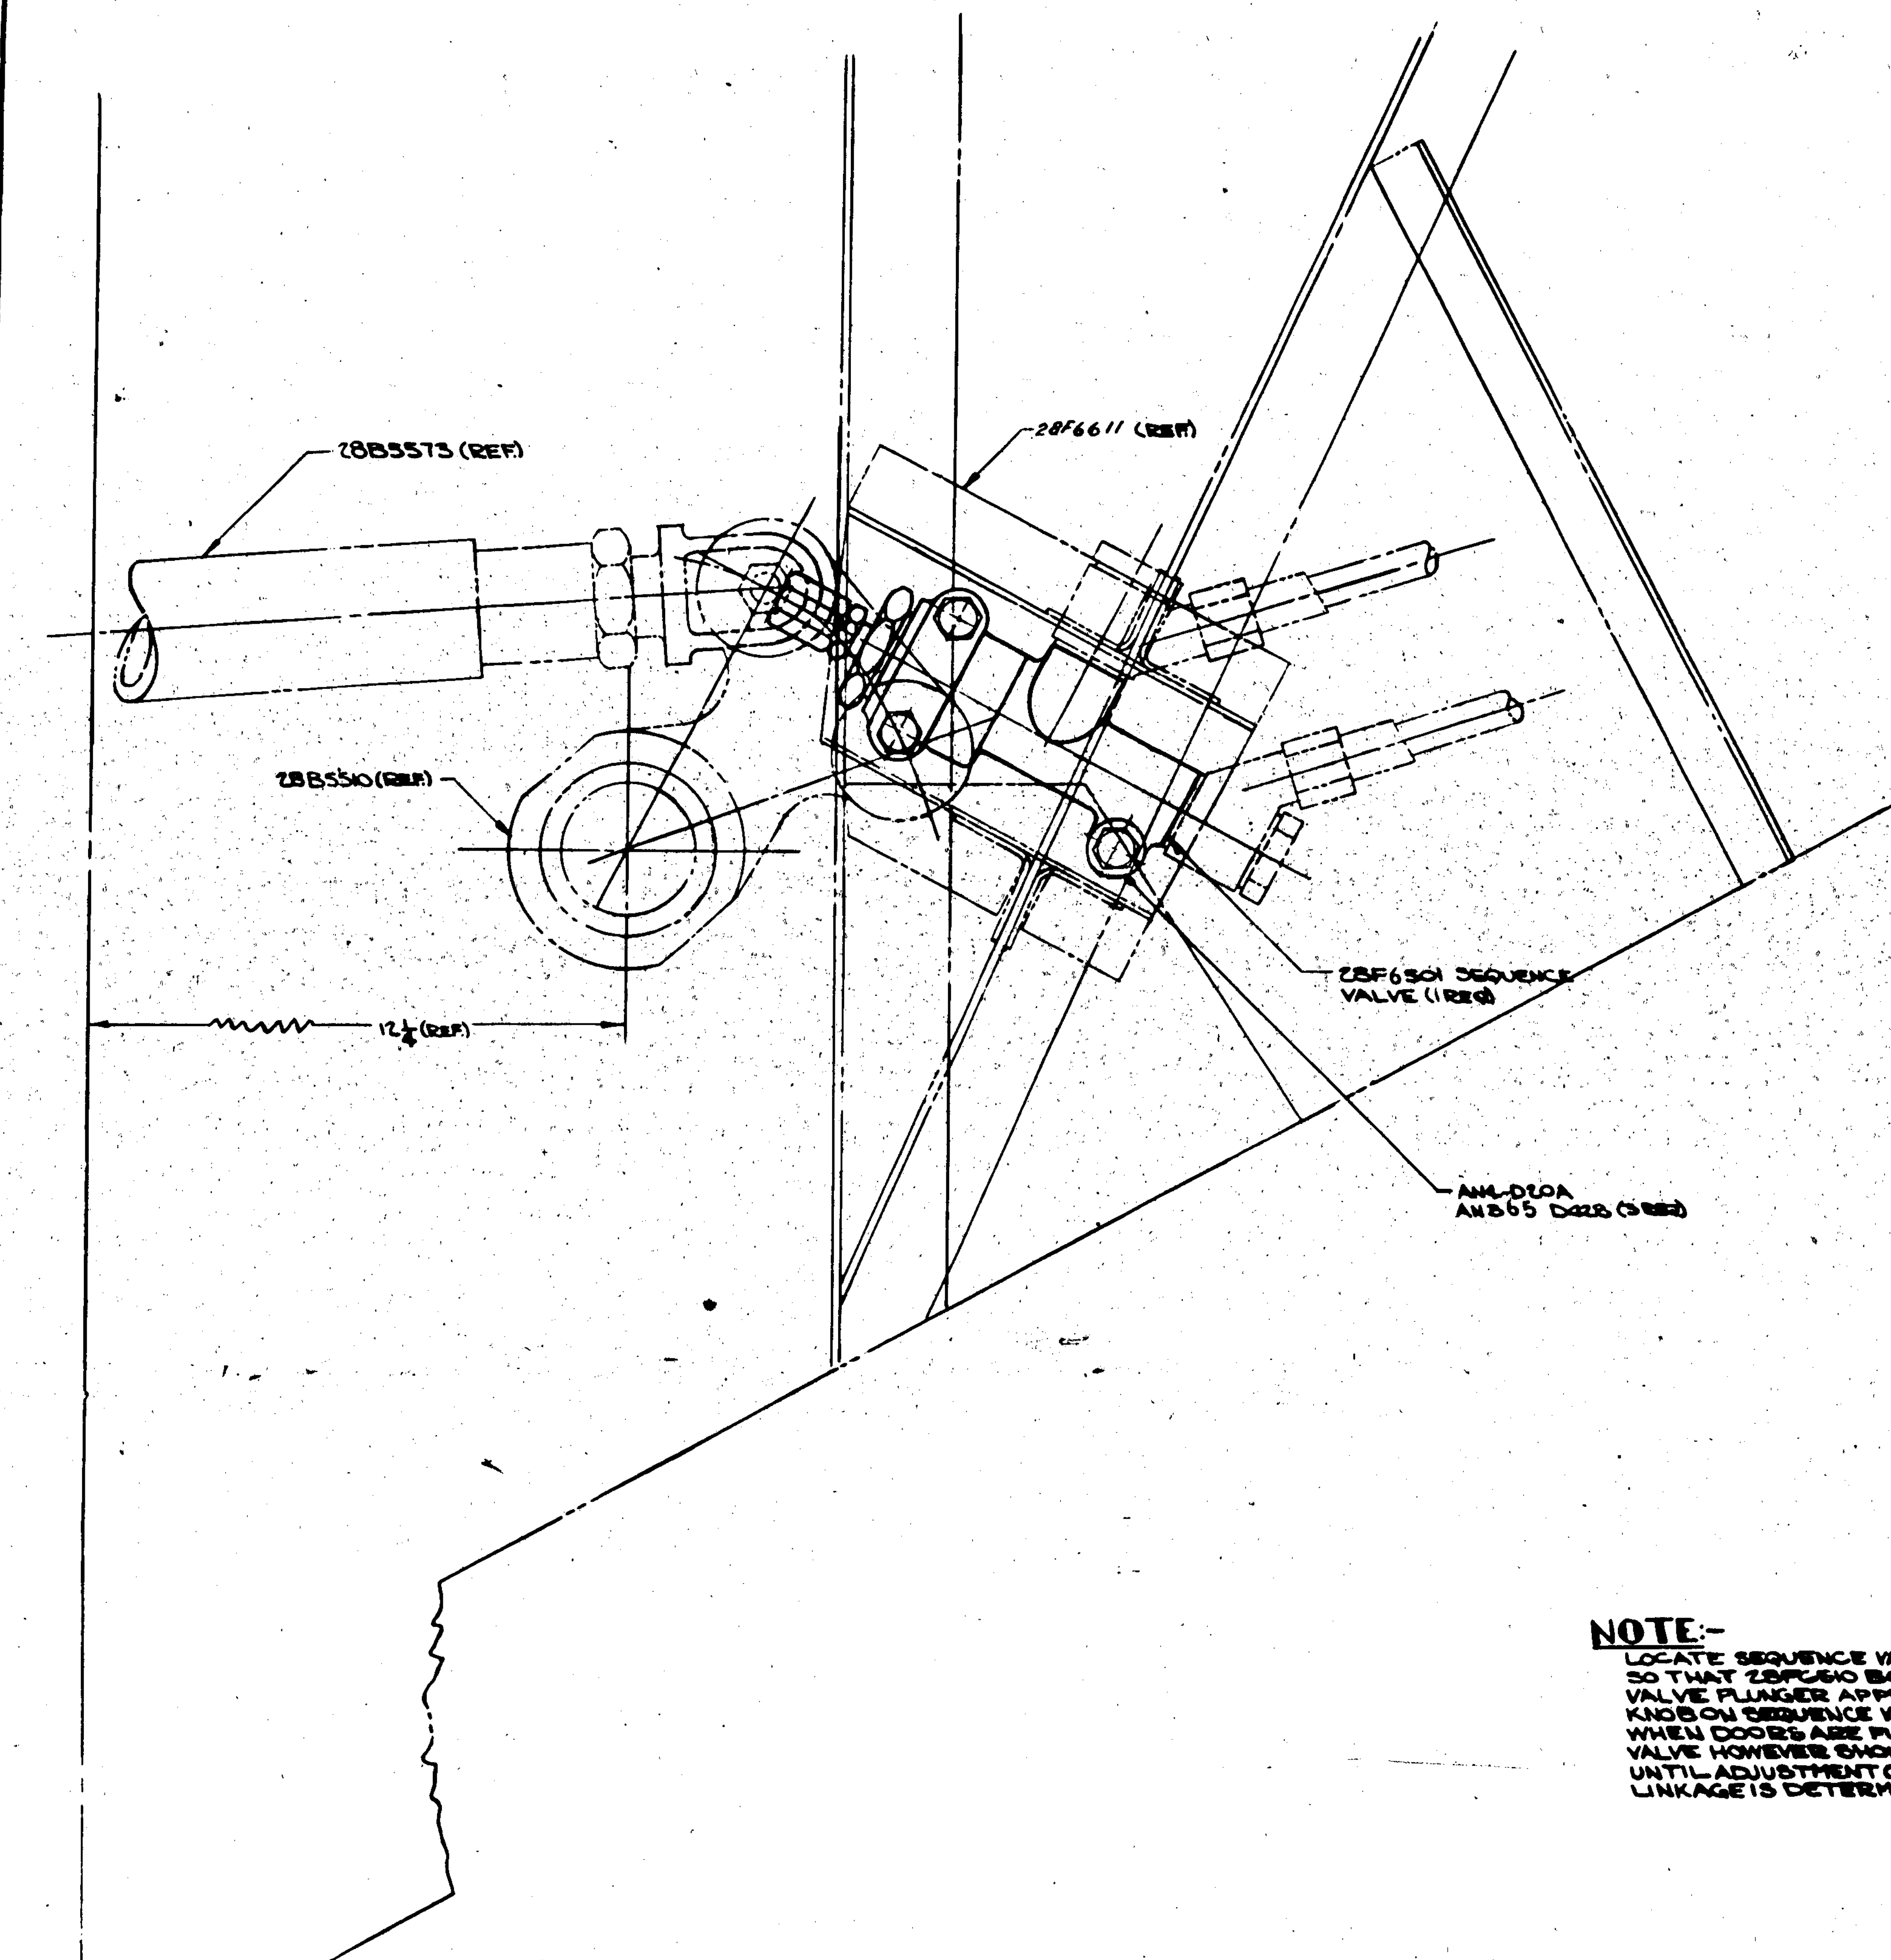



VIEW LOOKING FORWARD AT B'LKHD #20

NOSE WHEEL DOOR OPERATING LINKAGE SHOWN WITH NOSE WHEEL DOORS CLOSED.

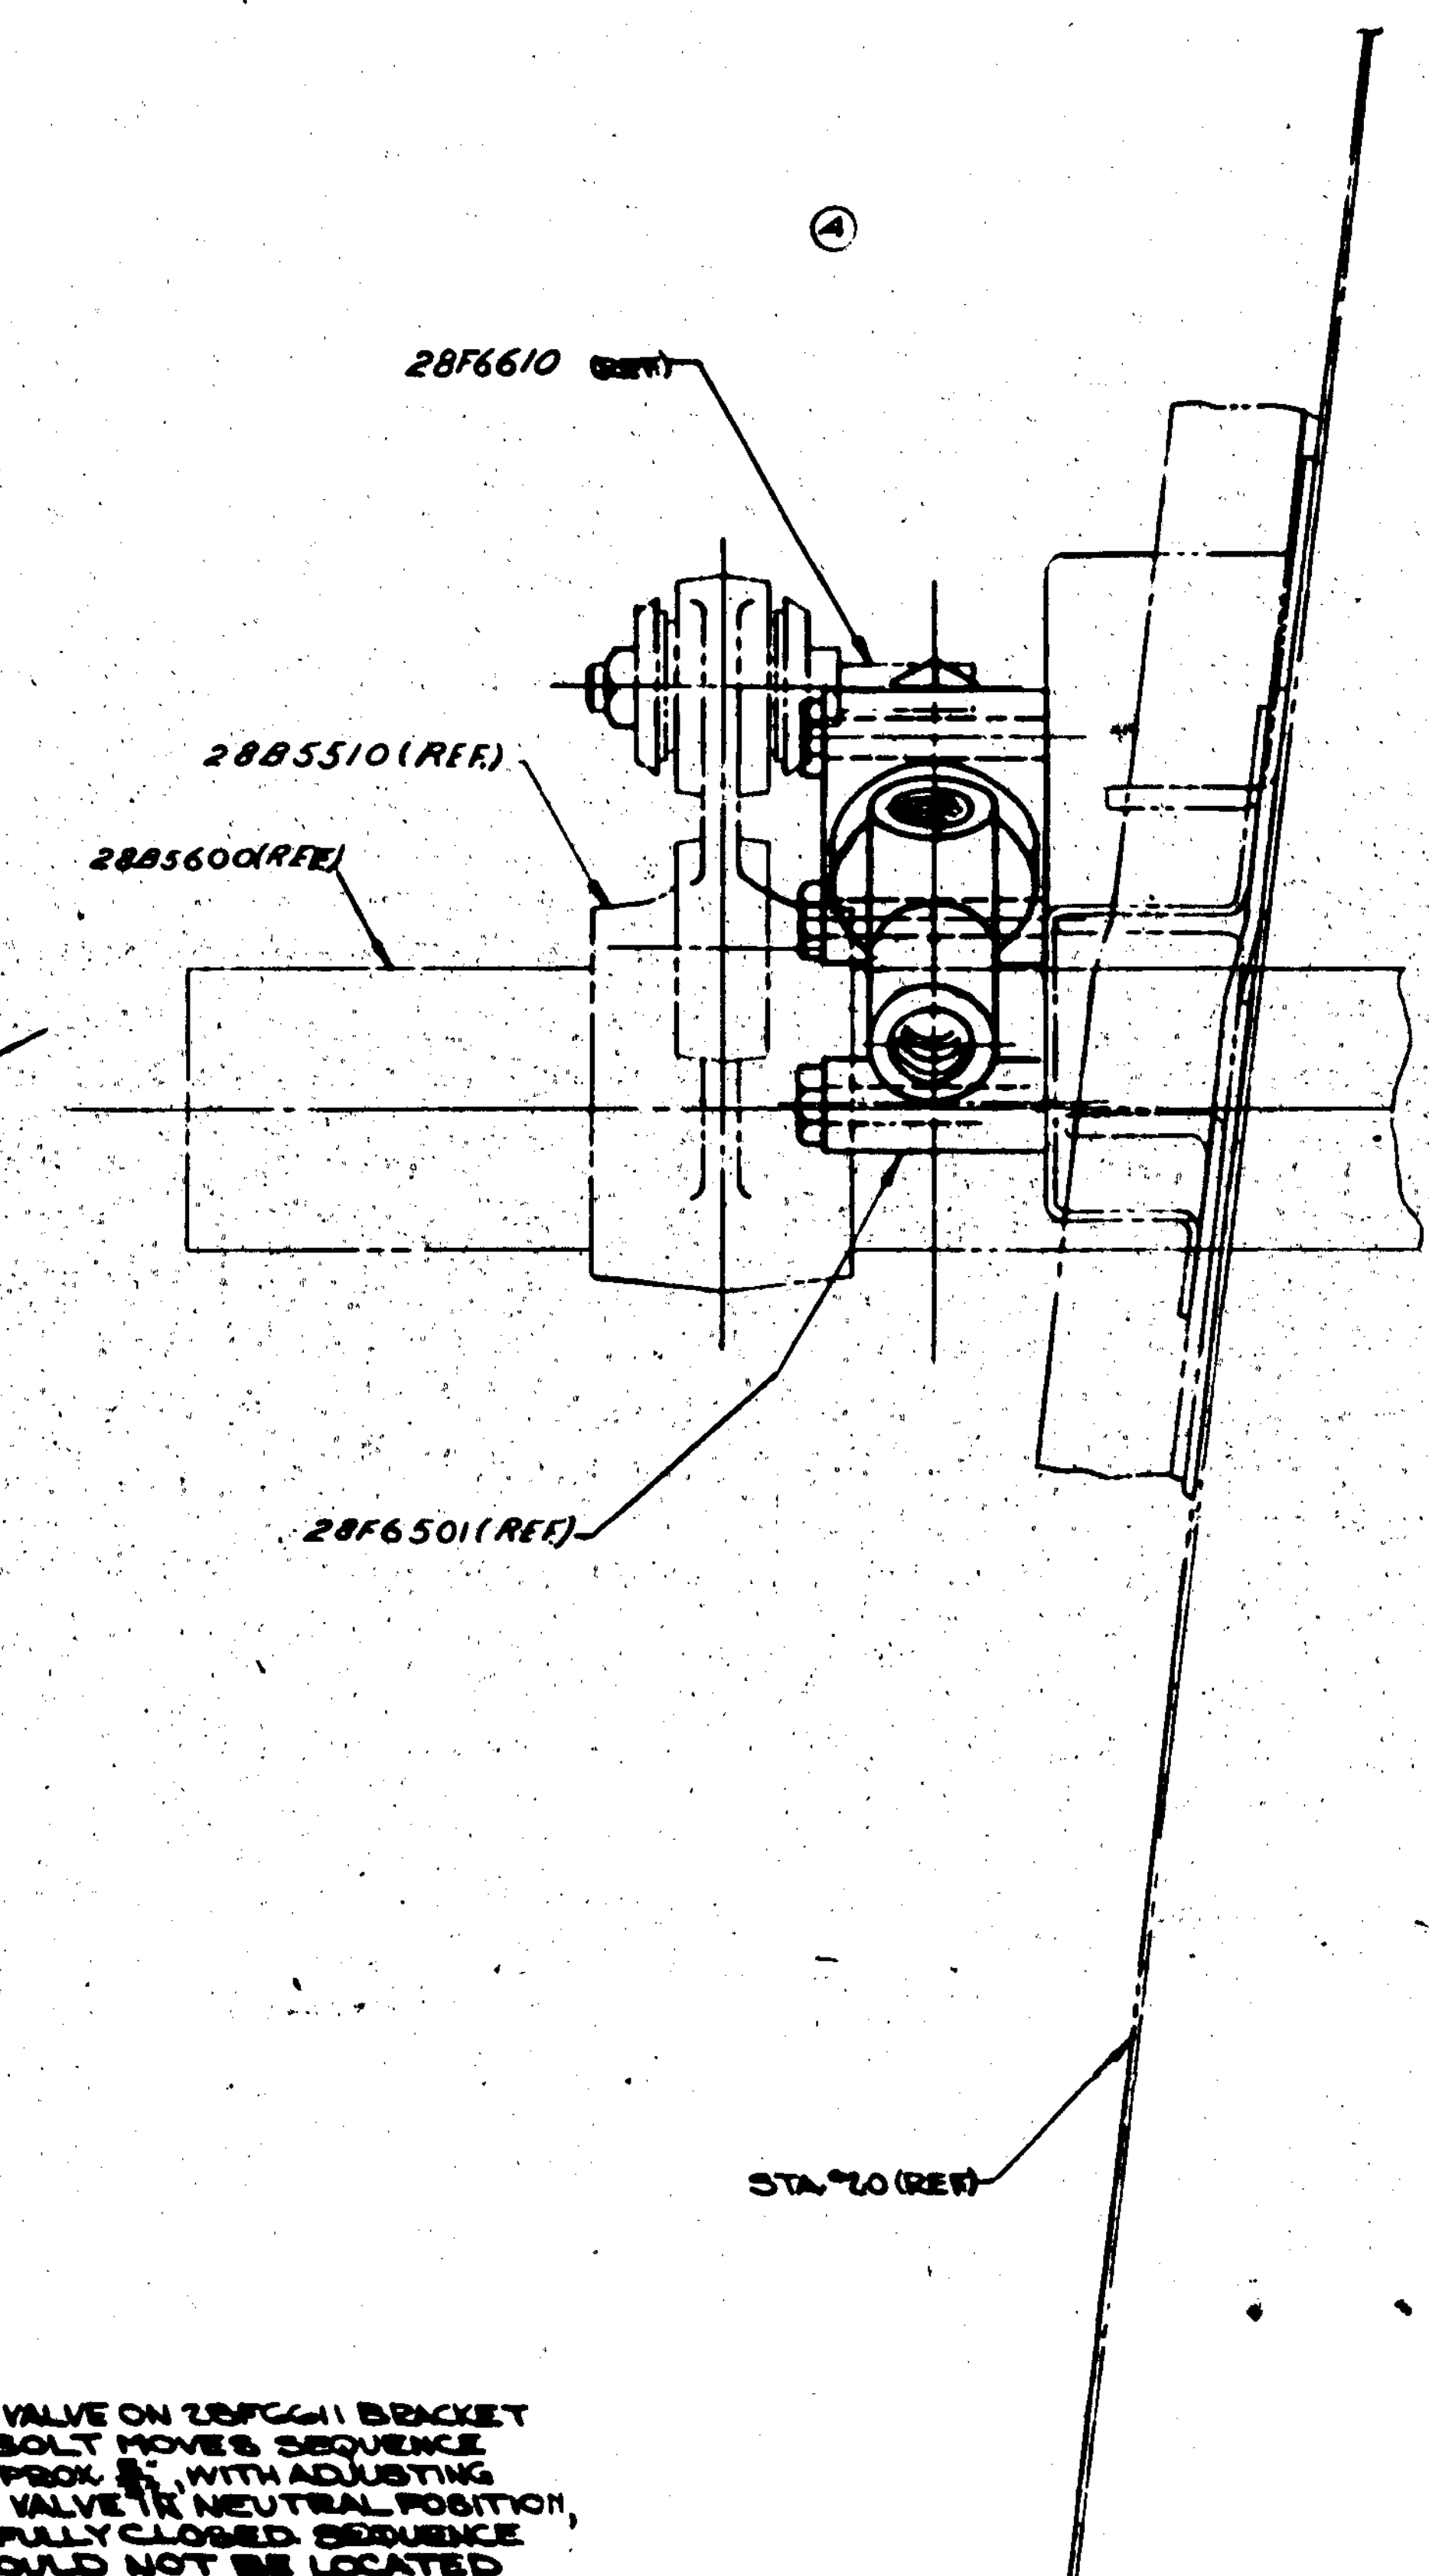


**NOTE:-**
LOCATE SEQUENCE VALVE ON 28F6611 BRACKET SO THAT 28F6610 BOLT MOVES SEQUENCE VALVE PLUNGER APPROX. ⅛", WITH ADJUSTING KNOB ON SEQUENCE VALVE IN NEUTRAL POSITION, WHEN DOORS ARE FULLY CLOSED. SEQUENCE VALVE HOWEVER SHOULD NOT BE LOCATED UNTIL ADJUSTMENT ON 28B5573 ARM & DOOR LINKAGE IS DETERMINED.

| PART NO. | STOCK | MATERIAL | SPEC. | REQ. -0 |
|---|---|---|---|---|
| AN365-D428 | | | | 3 |
| AN4-D20A | | | | 3 |
| 28F6501 | | | | 1 |

PARTS LIST PER ASSY.

SCALE: ½" = 1'-0"

| | |
|---|---|
| HEAT TREAT | NONE |
| FINISH | NONE |

NAME: INSTALL. - SEQ. VALVE NOSE WHEEL DOOR LOCK-HYD SYS

CONSOLIDATED AIRCRAFT CORP. SAN DIEGO, CALIF.

J 28F6612

R

H 383